GENERALSECURITY WAVE WAVE TO OPEN TO OPEN 0 **GS-TCHEXIT-001** Non-contact induction Wide Voltage DC12-24V/0.5A NO / NC / COM Sensitive distance 5-20cm 19mm sensor button VDC 12~24 Contactless Two Color Stainless Steels

FEATURES


- ANSI standard face plate 115*40mm
- Standby blue LED
- Active green LED

GENERALSECURITY.COM.AU

SPECIFICATION

GS-TCHEXIT-001

Model	GS-TCHEXIT-001
Size (mm)	115L*40W*25H
Weight (kg)	0.12
Power Supply	DC 12-24V/0.5A
Output Contact	NO / NC / COM
Material	304 Stainless steel panel
LED Indicator	Standby blue, Response green
Sensitive Distance	5-20cm
Mechanical Life	500,000 tested (aging test qualified)
Operating Temp	-20°C~55°C (-4-131F)
Operating Humidity	0-95% (RH)
Package Quantity	1 PCS / Box, 100PCS / Carton

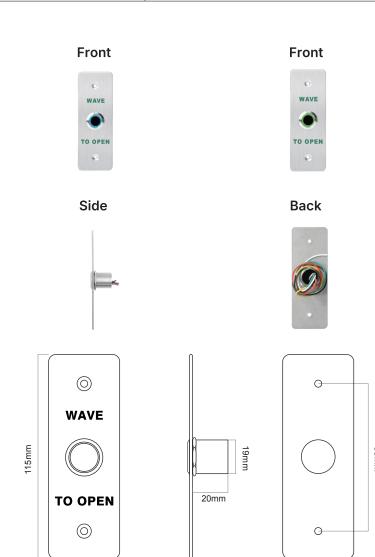

40mm